
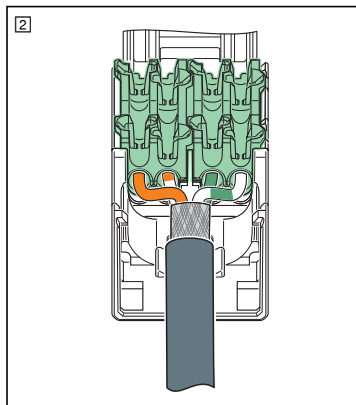




DE Empfohlene Kabel finden Sie unter:
 EN Recommended cables can be found at:
 FR Les câbles recommandés sont disponibles sous :
 IT Per i cavi consigliati vedere:
 ES Encontrará cables recomendados en:
 PT Cabos recomendados disponíveis em:
 TR Önerilen kabloların bulunduđu adres:
 RU Рекомендѹемые кабели представлены на сайте:

phoenixcontact.net/products.


Italiano	Français	English	Deutsch	
Caratteristiche di trasmissione	Propriétés de transmission	Transmission properties	Übertragungseigenschaften	≤ 1 Gbit/s
Grado di protezione	Indice de protection	Degree of protection	Schutzart	IP20
Cavo	Câble	Cable	Kabel	Ø 5 mm ... 9 mm
Isolamento del conduttore	Isolation du fil	Wire insulation	Aderisolation	Ø ≤ 1,6 mm
Numero fili	Nombre de brins	Number of litz wires	Anzahl Litzen	1 ... 19
Cicli d'innesto	Cycles d'enfichage	Insertion/withdrawal cycles	Steckzyklen	≥ 750
Range di temperatura	Plage de température	Temperature range	Temperaturbereich	-40 °C ... +70 °C

Español	Português	Türkçe	Русский	
Características de transmisión	Propriedades de transmissão	Aktarım özellikleri	Передаточные характеристики	≤ 1 Gbit/s
Grado de protección	Tipo de proteção	Koruma türü	Класс защиты	IP20
Cable	Cabo	Kablo	Кабель	Ø 5 mm ... 9 mm
Aislamiento del hilo	Isolamento do cabo	Damar izolasyonu	Изоляция жил	Ø ≤ 1,6 mm
Nº de conductores	Quantidade de fios	Kablo sayısı	Количество гибких проводников	1 ... 19
Ciclos de enchufe	Ciclos de encaixe	Takma döngüleri	Циклы установки	≥ 750
Margen de temperatura	Faixa de temperatura	Sıcaklık aralığı	Диапазон температур	-40 °C ... +70 °C

DE Einbauanweisung
 EN Installation notes
 FR Instructions d'installation
 IT Istruzioni di installazione

ES Instrucciones de montaje
 PT Instruções de instalação
 TR Montaj talimatı
 RU Инструкция по установке

Ethernet	1421607	1421877	1421876
PROFINET	1421126	1421128	1421127
VARAN	1406335	1406338	1406341

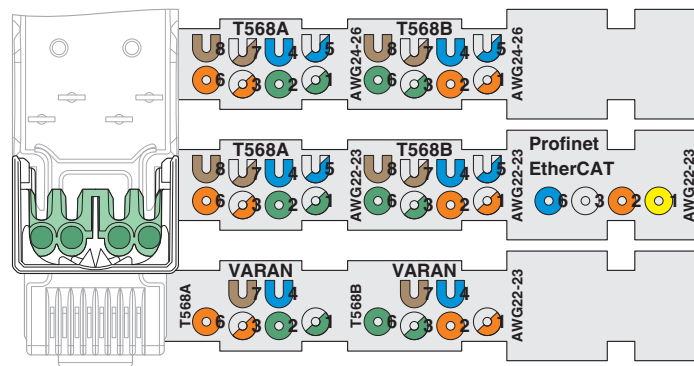

Ethernet, AWG 24 – 26






TIA-568A				TIA-568B			
BN	WH/BN	BU	WH/BU	BN	WH/BN	BU	WH/BU
OG	WH/OG	GN	WH/GN	GN	WH/GN	OG	WH/OG

PROFINET, AWG 22 – 23

TIA-568A				TIA-568B				PROFINET/EtherCAT			
BN	WH/BN	BU	WH/BU	BN	WH/BN	BU	WH/BU	–	–	–	–
OG	WH/OG	GN	WH/GN	GN	WH/GN	OG	WH/OG	BU	WH	OG	YE

VARAN, AWG 22 – 23

VARAN, TIA-568A				VARAN, TIA-568B			
–	BN	BU	–	–	BN	BU	–
OG	WH/OG	GN	WH/GN	GN	WH/GN	OG	WH/OG

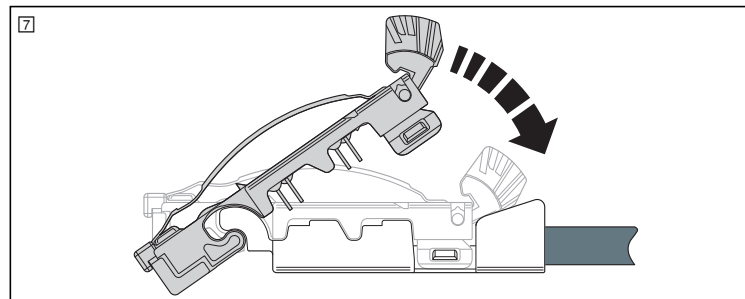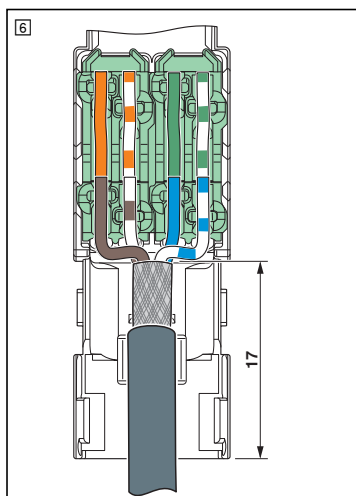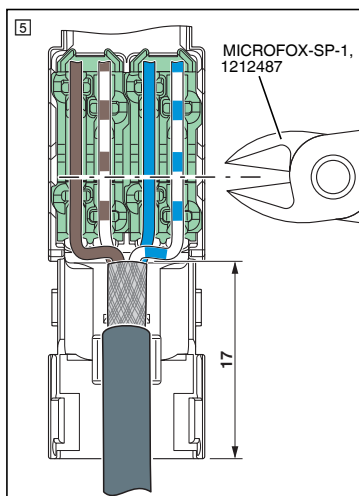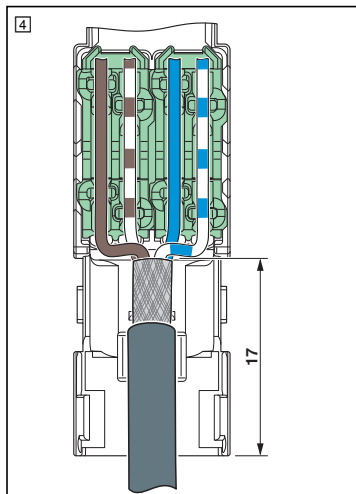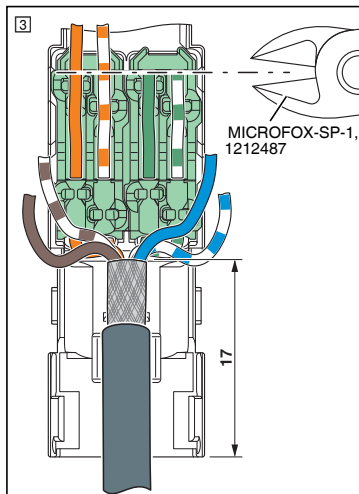

Deutsch

! **ACHTUNG:** Nach Schritt 3 können Sie den Stecker nicht wieder öffnen.

English

! **NOTE:** After step 3 you cannot open the plug again.

Français

! **IMPORTANT :** Lorsque l'étape 3 a été effectuée, il n'est plus possible d'ouvrir le connecteur.

Italiano

! **IMPORTANTE:** Dopo il punto 3 non è più possibile riaprire il connettore.

Español

! **IMPORTANTE:** Tras el paso 3 no puede volver a abrirse el enchufe.

Português

! **IMPORTANTE:** Após o passo 3, o conector não pode ser mais reaberto.

Türkçe

! **NOT:** 3 adımından sonra, konektörü tekrar açmanız mümkün değildir.

Русский

! **ПРЕДУПРЕЖДЕНИЕ:** После шага 3 штекер не сможет быть снова открыт.

