



Conector de compresión de aluminio, tiene derivación tipo "L" de forma cerrada, es útil para derivaciones de aluminio-aluminio y aluminio-cobre. Se surte embolsado y con pasta antioxidante "Deltatron".

Aluminum alloy compression connector "L" type, for aluminum and ACSR cable run and aluminum and ACSR tap. May be used for copper cable tap by using an inhibitor paste. Its packaged in plastic bag with inhibitor paste "Deltatron".

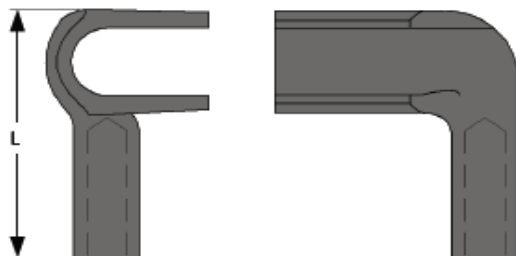

Especificación CFE 55000-87
CFE specification CFE 55000-87

CD9 9-12/9-12 XL1313R



Note (*)
T - Stranded

Catálogo Catalog	Principal / Run AWG		Derivación / Tap AWG		Dimensiones en mm Dimensions in mm		
	Aluminio Aluminum	ACSR	Aluminio Aluminum	ACSR	A	H	L
XL1110R	6 T(*) 2/0 T(*)	6T(6/1) (*) 2/0T(6/1)(*)	8 T(*) 1/0 T(*)	8 T(6/1)(*) 1/0 T(6/1)(*)	28	62	64
XL1313R	4 T(*) 4/0 T(*)	4T(6/1)(*) 4/0T(6/1)(*)	4 T(*) 4/0 T(*)	4 T(6/1)(*) 4/0 T(6/1)(*)	28	67	79

Nota

Indentación: 3 -"VC5" o 2 -"VC6" por lado, excepto el "XL 1313R" requiere 4 -"VC6" en la derivación.
(Herramientas marca "Anderson")

Note:

Crimping: 3 -"VC5" or 2 -"VC6" by side, except "XL1313R, this type require 4 -"VC6" in the tap.
(Tools: Anderson brand)