

STAINLESS STEEL HUBS



Features:


- Manufactured in type 316 stainless steel to meet any stringent sanitary condition
- Polished with standard "brite" finish to increase corrosion resistance and aesthetic appearance
- Designed for use with stainless threaded conduit
- Use of neoprene O-ring assures weatherproof seal
- Includes a type 316 stainless steel locknut for a secure installation
- No package qty. required

Certifications and Compliances:

- Manufactured to UL 514B / NEMA standards

Applications:

To connect threaded stainless conduit to a threadless opening in a box or enclosure in an outdoor or indoor location. To positively bond conduit to a box or enclosure.

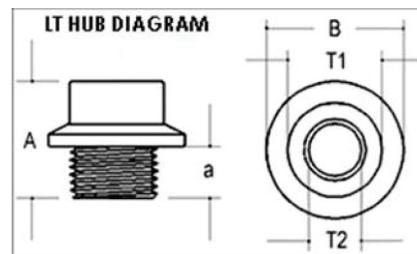

Industries Commonly Served:

- Food & Beverage Production
- Marine & Coastal Facilities
- Chemical Plants
- Water & Wastewater Treatment
- Pharmaceuticals & Cosmetics
- Refining & Extraction Sites
- Petrochemical Operations
- Pulp & Paper Mills
- Along with other corrosive environments

Part Number	DIM A	A	B	a	T1	T2	Male Thread O.D.	Weight each per lb
S60500LT00	1/2"	1.520"	1.590"	0.620"	1.010"	0.750"	0.840"	0.18
S60700LT00	3/4"	1.530"	1.820"	0.625"	1.260"	0.960"	1.050"	0.24
S61000LT00	1"	1.830"	2.080"	0.625"	1.560"	1.210"	1.315"	0.42
S61200LT00	1-1/4"	2.060"	2.490"	0.850"	1.960"	1.560"	1.660"	0.64
S61500LT00	1-1/2"	2.080"	2.560"	0.870"	2.140"	1.800"	1.900"	0.66
S62000LT00	2"	2.155"	3.125"	0.875"	2.730"	2.290"	2.375"	1.02
S62500LT00	2-1/2"	2.720"	3.620"	0.950"	3.310"	2.730"	2.875"	1.92
S63000LT00	3"	2.91"	4.375"	0.975"	3.860"	3.350"	3.500"	2.40
S64000LT00	4"	3.190"	5.460"	1.090"	5.000"	4.360"	4.500"	4.06

All dimensions are for informational purposes only *Tolerances +/- 5%