


## Dual-Rated Mechanical Connectors

All-aluminum-body lugs for use on copper and aluminum conductors.

- Easy installation — no special tools required
- Tin plated for low contact resistance
- UL® 486B tested, AL9CU rated
- Slotted screw on lugs up through 2/0 str.; 5/16" socket screw on sizes 250 through 350 kcmil; 3/8" hex socket on sizes 500 kcmil and above



### Type ADR—ALCÜL™ Single-Conductor, One-Hole Mount\*

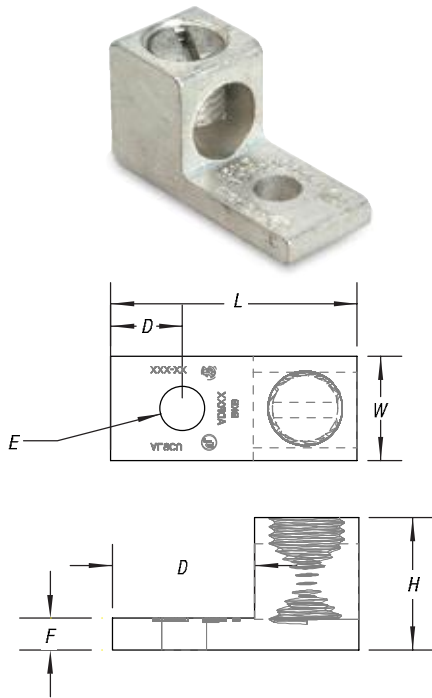

CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)						
	MAX.	MIN.	L	W	H	D	E	F	G
<b>Slotted Screw</b>									
ADR6	#6 Str.	#14	1 1/4	1/2	3/64	1 5/64	1/4	5/64	4 5/64
ADR2	#2 Str.	#14	1 1/2	1/2	9/16	1 1/64	1/4	1/64	1 1/16
ADR11	1/0 Str.	#14	1 1/2	3/8	2 5/32	1/16	1/4	3/16	2 1/32
ADR21	2/0 Str.	#14	1 1/2	3/8	2 5/32	1/16	1/4	3/16	2 1/32
<b>Socket Screw</b>									
ADR25	250	#6 Str.	2	1	1 1/8	1 5/32	5/16	1/4	1
ADR30	300	#6 Str.	2	1	1 1/8	1 5/32	5/16	1/4	1
ADR35	350	#6 Str.	2 1/4	1 1/8	1 1/4	1 1/2	3/8	1/4	1 1/8
ADR50	500	#4 Str.	2 3/16	1 1/2	1 1/16	3/4	3/8	5/16	1 19/32
ADR60	600	#2 Str.	3 3/16	1 1/2	1 1/16	1 3/16	3/8	1/16	1 13/16
ADR6004*	600 (2) 250	#4 Str. (2) 1/0 Str.	2 3/16	1 1/8	1 13/16	5/8	3/8	5/16	1 1/2
ADR80	800	300	3 3/8	1 3/4	1 15/16	5/8	5/8	1/2	1 3/4
ADR99	1000	500	3 3/8	1 3/4	1 15/16	5/8	5/8	1/2	1 3/4

\* Not UL Listed or CSA Certified.

### Type ADR—ALCÜL™ Single-Conductor, Two-Hole Mount\*



CAT. NO.	CONDUCTOR RANGE (AL OR CU)		DIMENSIONS (IN.)						
	MAX.	MIN.	L	W	H	D	E	F	G
ADR35-12#	350 kcmil	6 Str.	4 1/4	1 1/4	1 3/8	3/8	1/2	3/16	3
ADR60-12D	600 kcmil	2 Str.	5 5/16	1 1/2	1 1/2	3/8	1/2	3/8	3 1/16
ADR80-12D	800 kcmil	300 kcmil	6 3/16	1 3/4	1 1/8	3/8	1/2	3/16	3 1/16
ADR99-12D	1,000 kcmil	500 kcmil	6 3/16	1 3/4	1 1/8	3/8	1/2	3/16	3 1/16

\* NEMA spacing: 1 1/4" centers

# UL Listed. Connectors accommodating conductors 600 kcmil and larger have double row of set screws (D suffix).