


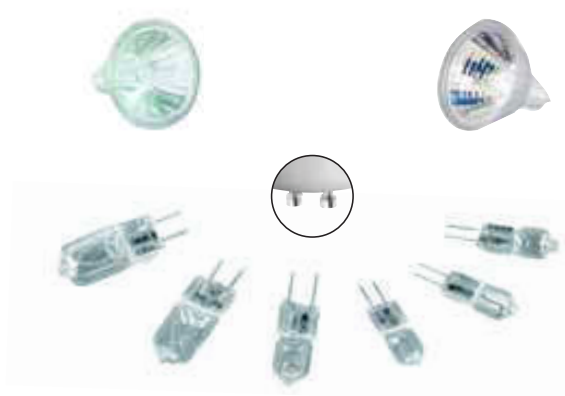

Producto	Potencia	Volts	Lúmenes	Tiempo de Vida	Ángulo	Base	Dimensiones del Producto (BXA) +/-5 mm
BAB	20 W	12 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
EXT	50 W	12 V ~	-	2 000 h	12°	GX5.3	50 mm x 45 mm
EXN	50 W	12 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
EXN/C	50 W	12 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
MR16-130-20W	20 W	130 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
MR16-130-20W/C	20 W	130 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
MR16-130-50W	50 W	130 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
MR16-130-50W/C	50 W	130 V ~	-	2 000 h	38°	GX5.3	50 mm x 45 mm
JC10	10 W	12 V ~	130 lm	2 000 h	-	G4	30 mm x 8 mm
JC20	20 W	12 V ~	350 lm	2 000 h	-	GY6.35	30 mm x 8 mm
JCD20	20 W	130 V ~	300 lm	2 000 h	-	GY6.35	48 mm x 13 mm
JC50	50 W	12 V ~	600 lm	2 000 h	-	GY6.35	40 mm x 11 mm
JCD50	50 W	130 V ~	600 lm	2 000 h	-	GY6.35	48 mm x 13 mm
G9-25W	25 W	130 V ~	200 lm	2 000 h	-	G9	38 mm x 13 mm
G9-40W	40 W	130 V ~	800 lm	2 000 h	-	G9	45 mm x 13 mm
G9-60W	60 W	130 V ~	850 lm	2 000 h	-	G9	45 mm x 13 mm
JDR50	50 W	100-127 V ~	-	2 000 h	38°	Base Media	50 mm x 70 mm
JDR75	75 W	130 V ~	1 100 lm	2 000 h	38°	Base Media	50 mm x 70 mm
GU10-35/C	35 W	130 V ~	-	2 000 h	-	GU10	51 mm x 54 mm
GU10-50/C	50 W	130 V ~	-	2 000 h	-	GU10	51 mm x 54 mm
FTD	20 W	12 V ~	-	2 000 h	30°	G4	35 mm x 33 mm
FTH	35 W	12 V ~	-	2 000 h	30°	G4	35 mm x 33 mm
MR11-130-35W/C	35 W	130 V ~	-	2 000 h	38°	GX5.3	35 mm x 33 mm
AR-111/F	50 W	12 V ~	-	2 000 h	24°	G53	111 mm x 58 mm
AR-111/S	50 W	12 V ~	-	2 000 h	8°	G53	111 mm x 58 mm
PAR20	50 W	130 V ~	650 lm	2 000 h	30°	Base Media	64 mm x 82 mm
PAR30	75 W	130 V ~	1 000 lm	2 000 h	30°	Base Media	95 mm x 92 mm
PAR38	90 W	130 V ~	1 200 lm	2 000 h	30°	Base Media	121 mm x 135 mm
TRA-50	60 W	127 V / 12 V	-	-	-	-	54 mm x 26 mm